



TECHNICAL SPECIFICATION

Tape

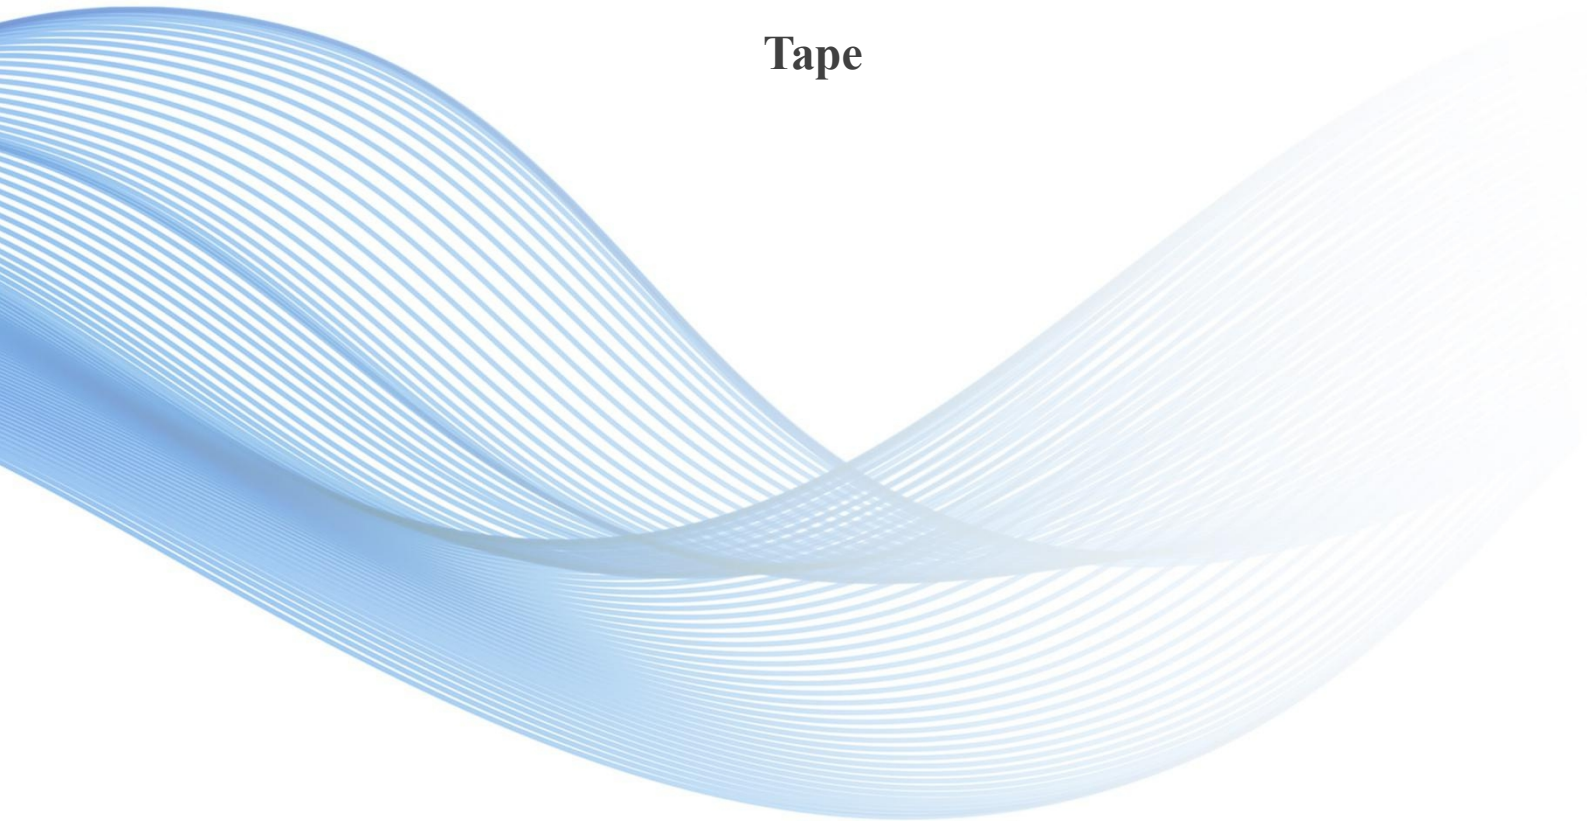

A	November 1, 2023	Louise	Mr.Xia	Hugo
Version	Date	Prepared	Reviewed	Approved

Tape

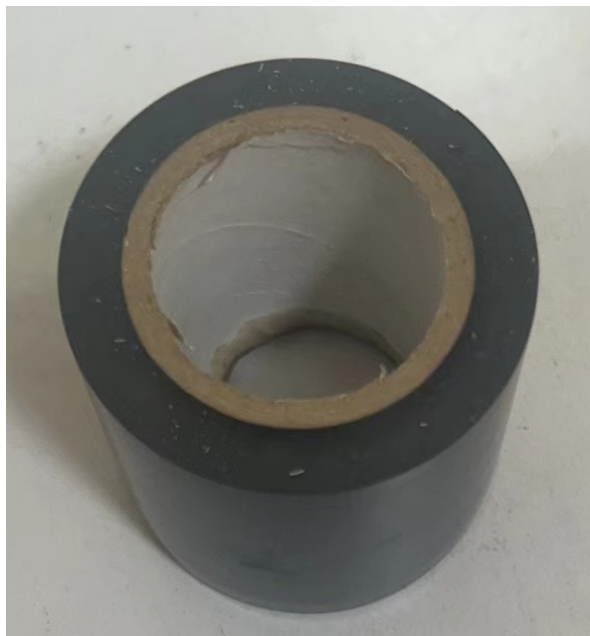

Tape (connector AISG db9/db18)	
Cable type	AISG 10m or AISG 20m
Connector type	db9 or db15
connector quantity	1
Dimension (Length x Width x Depth) (mm)	≥ 5000 x 50 x 0.18
Material	PVC or Butyl rubber
Voltage Rating at UL 510 (V)	≥ 600
Typical Dielectric strength	1000 V/mil
Insulation Resistance(MΩ)	>1
Adhesion to Steel (oz./in)	≥18
Adhesion to Backing (oz./in)	≥18
Breaking Strength(lbs./in)	≥15
Elongation (%)	≥ 200
Temperature Rating at UL 510 (°C)	80
UV Resistance	comply
Flammability (Maximum) at UL 510	UL 510 1 sec
Environmental Standard	RoHS 2002/95/EC
Structure	Roll format